

Screw Compressors

SX SERIES

Capacities from: 8.8 to 28.6 cfm

Pressures from: 80 to 217 psig




Built for a lifetime

Maximum efficiency and reliability have long been the hallmarks of Kaeser Compressors. Our commitment to excellence drives us to continually enhance and optimize our compressed air system solutions. With a cutting edge research and development team committed to producing industry leading products, Kaeser constantly strives to offer lasting solutions for our customers' compressed air needs. The SX series rotary screw compressor delivers on all accounts.

In every machine Kaeser builds you'll find many features to enhance reliability and simplify maintenance, from the heavy gauge steel frame with double vibration isolation to the quick fluid change feature.

Our airends are built to stand up to many years of tough service. We make TEFC motors standard and use pipe instead of cheap tubing. A well-planned cabinet design and component layout reduce noise and footprint with easier access during preventive maintenance. The list goes on and on. Our customers expect excellence and we make it happen.

Built to perform. Built to last. Kaeser compressors are built for a lifetime.

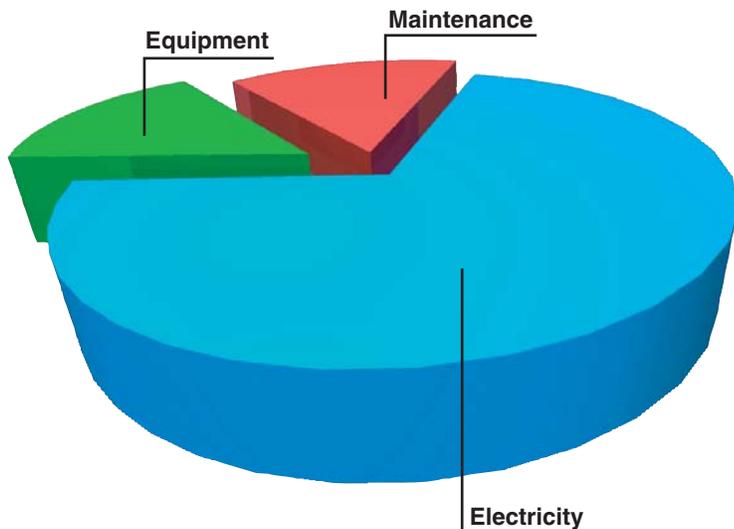

70% of Your Long Term Compressor Cost is Electricity

Analyze the total cost of a compressed air system and you'll realize that power cost is significant. In just one year it could exceed the cost of the compressor itself. Over a period of ten years, energy may add up to 70% of your overall costs for buying, operating, and maintaining an air system.

That's why it is important to consider energy efficiency when evaluating a new compressor.

Kaeser's proprietary Sigma Profile compresses air very efficiently and delivers more cfm per kW than other airend designs. Combined with high-efficiency motors and lower internal pressure drop, this results in a compressor designed to achieve significant savings.

Every Kaeser product demonstrates our commitment to providing unrivaled quality and performance at the lowest overall cost.



Sigma Control™ Basic

A simple and reliable interface offers convenient pressure control and system monitoring with status display and maintenance reminders. Displays include discharge pressure and temperature, load and service hours, as well as fault indicators.

Sigma Profile Airend



Our power-saving, proprietary airend design delivers pressures up to 217 psig. Kaeser uses a newly designed airend for this SX series. It is precision-machined to close tolerances and optimized in size and profile to match the low airend speeds with their best specific performance.

TEFC Motor with Reduced Voltage Starter

Premium-efficiency, totally enclosed, fan



cooled (TEFC) motors with Class F insulation are standard for long life in harsh environments.

Tri-voltage 208-230/460 or 575 V, 3-phase, 60 Hz is standard. Other voltages are available. Magnetic Wye-Delta reduced voltage starters ensure low starting current and smooth acceleration.

SX

Designed for Reliability, Simplicity and Performance



Excellent Fluid Separation



We combine an over-sized cyclone separator vessel (ASME or CRN) with a convenient spin-on coalescing filter for superior fluid separation and exceptionally low carry-over (3 ppm or less). This results in less maintenance and better downstream air quality.

High-Efficiency Coolers with Filter Mat

Conveniently located on the outside of the unit, our standard high-efficiency coolers provide maximum



cooling resulting in approach temperatures as low as 11°F for more moisture separation at the compressor discharge and better air quality. A filter mat simplifies cooler maintenance. Dirt and dust build up on the outside of the filter, where it is easily seen and removed. This extends cooler service intervals and increases thermal reserve for harsher conditions.

Removable Panel

Single removable service panel provides full access to all components for easy maintenance.

Double-flow Cooling Fan

Patent-pending double-flow fan design increases air flow through the unit while reducing overall power requirements and sound levels. Sickle-shaped fan blades with foam-covered air guiding ring.



Ease of Maintenance

Many features make our SX models easy to service, including:

- 1 Easy single panel access for routine service
- 2 Maintenance reminders on controller
- 3 Cartridge style 1 micron inlet filter
- 4 Spin-on 10 micron fluid filter
- 5 Quick fluid change system with drain hose
- 6 Single piece multi-ribbed belt needs no adjustments
- 7 Side panel windows to view fluid level and test the auto drain (on T versions and AirCenters)
- 8 Cleanable filter mat on coolers*

*no tools required

Optimized Air Flow Design

Air is drawn into separate cooling zones for the drive motor and coolers. This “split cooling” design eliminates pre-heating, increasing cooling efficiency without increasing power consumption. Cooler temperatures also promote longer lubricant and motor life. Cooling air is exhausted through a single port at the top of the cabinet. Ducting this air enables heat recovery and further reduces noise.

Air for compression enters through a separate grill on the right side of the cabinet. It is then filtered through a two-stage air intake filter. This filter protects the airend and extends fluid change intervals.



The SX unit can be installed in a corner and it will still provide easy access for maintenance while allowing for proper cooling air flow.

Enclosure

Our superior cabinet design reduces noise and footprint while offering easy access for service. A heavy-duty metal enclosure with a durable powder-coated finish keeps noise in but dirt and dust out. Thick sound insulation keeps sound levels as low as 61 dB(A), up to 10 dB(A) quieter than comparable units.

Lockable panels provide easy access to all maintenance items. The fluid level indicator is visible through a conveniently placed window in the cover.

Internal and external vibration isolators eliminate stress on piping and wire connections, further increasing reliability.

Electrical components are housed in a spacious, ventilated control cabinet. Wiring is neatly arranged and terminals are clearly identified.

Fluid Cooling System

All units are filled with Kaeser Premium Fluid to cool, clean, and lubricate the airend. A thermostatically controlled combination valve ensures perfect fluid temperature regulation and incorporates a cooler by-pass and spin-on fluid filter. Main air and fluid lines are made of rigid pipe with flexible pipe connections. A 10 micron spin-on fluid filter is within easy reach of the front cover. This filter extends fluid life and protects the airend. The fluid level is easily checked while the compressor is running.

Options

Integral Refrigerated Dryer Option

SX “T” models have integral refrigerated dryers with moisture separators and electronic Eco-Drains.

The dryer features plate-type heat exchangers and moisture separator, with stainless steel construction for long life.



The Eco-Drain has a robust aluminum housing



and patented pilot air-controlled valve technology to ensure many years of reliable service even when subjected to harsh

condensate. Controlled by reliable capacitance sensors, these energy-saving drains remove condensate — but not valuable compressed air.

We use only CFC-free R134a refrigerant. The dryer is controlled through the compressor controller and requires no additional electrical hook up.

Sigma Control 2

This intelligent controller comes standard with multiple pre-programmed control profiles so you can select the one that best fits your application.

Sigma Control 2 monitors more than 20 critical operating parameters, shuts the unit down to prevent damage and signals if immediate service is required. It also tracks preventive maintenance intervals and provides notice when PMs are due. An RFID sensor provides secure access and simplifies maintenance.



Sigma Control 2 has superior communications capabilities. An Ethernet port and built-in web-server enable remote access. ModBus, Profibus, Devicenet and other industrial communications interfaces are also available as plug in options for seamless integration into plant control/monitoring systems. See our Sigma Control 2 brochure for details.

Other Options

- Five year warranty on airend, motor, and controller.
- AirCenter™ packages with refrigerated dryer, drain, and receiver tank.

Package Options



Standard Version



T-version with integrated refrigeration dryer



AirCenter with refrigerated dryer, drain, and air receiver tank

Compressed Air System Design

Kaeser's team of engineers are always at your service to help design or optimize your compressed air system.

Using our Air Demand Analysis (ADA) and Kaeser Energy Saving System (KESS) we can evaluate your existing installation and demonstrate how proposed changes will improve your system performance.

Kaeser can also produce two-dimensional and three-dimensional drawings of the proposed system. This is a huge benefit in project planning. It helps visualize new equipment and how it will fit into the building along with existing equipment, piping, walls, vents, etc. This facilitates installation planning.

From complex installations to challenging environments to limited space, Kaeser can design a system to meet your specific requirements for performance and reliability.

Technical Specifications for Standard Units

Model	Operating Pressure (psig)	Capacity at Operating Pressure ⁽²⁾ (cfm)	Motor (hp)	Dimensions L x W x H (in)	Weight (lb) ⁽³⁾	Sound Level dB(A) ⁽⁴⁾
SX 3 SX 3T SX 3 AirCenter	125	12.0	3	23 ¹ / ₄ x 24 ⁷ / ₈ x 38 ¹ / ₈	309	61
	160 ⁽¹⁾	9.2		23 ¹ / ₄ x 36 x 38 ¹ / ₈	408	
	—	—		23 ¹ / ₄ x 42 ³ / ₄ x 61 ¹ / ₂	628	
SX 4 SX 4T SX 4 AirCenter	125	15.9	4	23 ¹ / ₄ x 24 ⁷ / ₈ x 38 ¹ / ₈	309	62
	160	12.7		23 ¹ / ₄ x 36 x 38 ¹ / ₈	408	
	217	8.8		23 ¹ / ₄ x 42 ³ / ₄ x 61 ¹ / ₂	628	
SX 5 SX 5T SX 5 AirCenter	125	21.2	5	23 ¹ / ₄ x 24 ⁷ / ₈ x 38 ¹ / ₈	320	63
	160	17.0		23 ¹ / ₄ x 36 x 38 ¹ / ₈	419	
	217	12.7		23 ¹ / ₄ x 42 ³ / ₄ x 61 ¹ / ₂	639	
SX 7.5 SX 7.5T SX 7.5 AirCenter	125	28.3	7.5	23 ¹ / ₄ x 24 ⁷ / ₈ x 38 ¹ / ₈	342	66
	160	23.7		23 ¹ / ₄ x 36 x 38 ¹ / ₈	441	
	217	18.7		23 ¹ / ₄ x 42 ³ / ₄ x 61 ¹ / ₂	661	

⁽¹⁾ SX 3 pressure limited to 160 psig. ⁽²⁾ Performance rated in accordance with CAGI/ISO 1217 test code.

⁽³⁾ Weights may vary slightly depending on airend model. ⁽⁴⁾ Per ISO 2151 using ISO 9614-2.

Specifications are subject to change without notice.



Built for a lifetime.™

www.kaeser.com



Kaeser Compressors, Inc.
511 Sigma Drive
Fredericksburg, VA 22408 USA
Telephone: 540-898-5500
Toll Free: 800-777-7873
info.usa@kaeser.com

Kaeser Compressors Canada Inc.
3760 La Verendrye Street
Boisbriand, QC J7H 1R5 CANADA
Telephone: (450) 971-1414
Toll free: (800) 477-1416
info.canada@kaeser.com

Kaeser Compresores de México S de RL de CV
Calle 2 #123
Parque Industrial Jurídica
76100 Querétaro, Qro.
Telephone: 01 (442) 218 64 48
sales.mexico@kaeser.com

Kaeser Compresores de Guatemala y Cia. Ltda.
Calz. Atanasio Tzul 21-00, zona 12
El Cortijo II, Bodega 501
01012-Guatemala City
Telephone: +502 2412-6000
info.guatemala@kaeser.com

Certified Management Systems

